



TUCK POINT BLADE

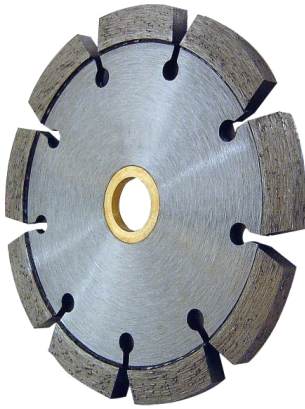

Features: Designed for repairing grout, cleaning and routing cement mortar joints between bricks.  
 Applications: Brick, block, concrete, masonry, and stone.

part#	dia.	width	height	bore
T3104-025	4"	.250"(6.35mm)	7/10mm	20-7/8"
T3145-025	4.5"	.250"(6.35mm)	7/10mm	7/8"
T3105-025	5"	.250"(6.35mm)	7/10mm	7/8"
T3106-025	6"	.250"(6.35mm)	7/10mm	7/8"
T3107-025	7"	.250"(6.35mm)	7/10mm	7/8"
T3108-025	8"	.250"(6.35mm)	7/10mm	7/8"

DROP SEGMENT TUCK POINT BLADE

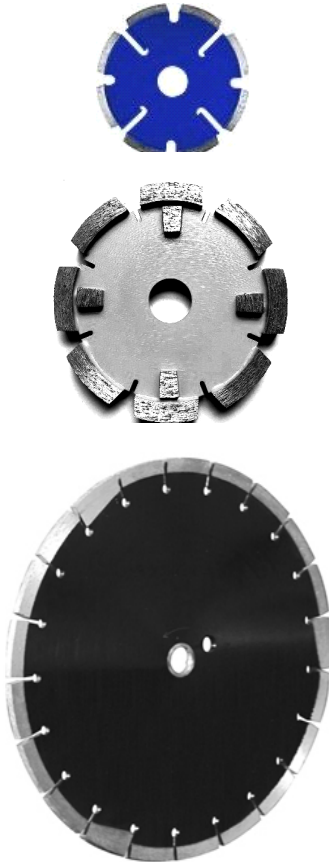

Features: Designed for repairing grout, cleaning and routing cement mortar joints. Drop segments prevent the blade from undercutting while grooving abrasive materials.  
 Applications: Green concrete, joints of brick or block, masonry, sandstone.

part#	dia.	width	height	Using Together
T3204-250	4"	.250"(6.35mm)	7/10/12mm	20-7/8"
T3245-250	4.5"	.250"(6.35mm)	7/10mm	7/8"
T3205-250	5"	.250"(6.35mm)	7/10mm	7/8"
T3207-250	7"	.250"(6.35mm)	7/10mm	7/8"
T3208-250	8"	.250"(6.35mm)	7/10mm	7/8"
T3209-250	9"	.250"(6.35mm)	7/10mm	7/8"
T3210-250	10"	.250"(6.35mm)	7/10mm	7/8"
T3204-350	4"	.375"(9.5mm)	7/10/12mm	20-7/8"
T3245-350	4.5"	.375"(9.5mm)	7/10mm	7/8"
T3205-350	5"	.375"(9.5mm)	7/10mm	7/8"
T3207-350	7"	.375"(9.5mm)	7/10mm	7/8"
T3208-350	8"	.375"(9.5mm)	7/10mm	7/8"
T3209-350	9"	.375"(9.5mm)	7/10mm	7/8"
T3210-350	10"	.375"(9.5mm)	7/10mm	7/8"

ACTIVE TUCK POINT BLADE



Features: Specially designed segments and newly engineered holes in the core allow extremely fast cutting.  
 Applications: Hard concrete, hard brick, block, masonry hard tile, stone.

part#	dia.	width	height	bore
T3304-250	4"	.250"(6.35mm)	7/10mm	7/8"
T3345-250	4.5"	.250"(6.35mm)	10/12mm	7/8"
T3305-250	5"	.250"(6.35mm)	10/12mm	7/8"
T3307-250	7"	.250"(6.35mm)	10/12mm	7/8"